

1

SPECTRA B100STR

Xenon Strobe Beacon

1J @ 0.75Hz

IP Rating: IP65

Temp: -25°C to +50°C

Unit weight: 100g DC, 105g AC
CE

Dimensions : Ø60 x 65.5mm
Cable entry: Plugable 2.5mm² terminals

X = Lens colour	A = Amber
R = Red	G = Green
B = Blue	C = Clear
Y = Yellow	

Order code Voltage
 B100STR030B/x 10-30V DC
 135mA @24V DC

B100STR115B/x 115V AC 30mA
 B100STR230B/x 230V AC 20mA

Mountings

Panel mount Ø37mm (PG29)

Tel : +44 (0)20 8743 8880 Fax : +44 (0)20 8740 4200
 mail : sales@e2s.com web : www.e2s.com



2

ATTENTION: Installation must be carried out by an electrician in compliance with the latest codes and regulations.



ATTENTION: Disconnect from power source before installation or service to prevent electric shock.

ATTENTION: On strobe beacons allow a minimum of 2 minutes for hazardous high voltage to discharge from unit.

ATTENTION: Lens on unit will be hot allow to cool prior to removal.

A

SPECIKA B100STR

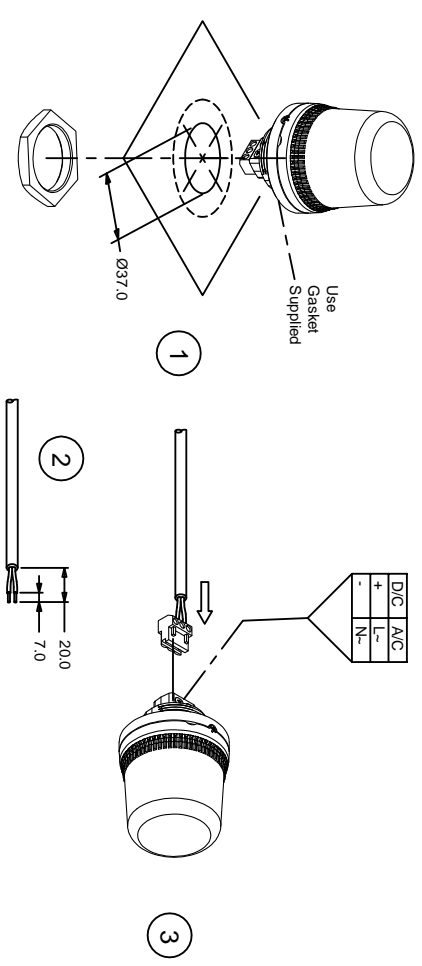

Dimensions in mm

