

Specification

echnica


## CO-D4 Carbon Monoxide Sensor Miniature Size



PATENTED and PATENT PENDING

< 0.1



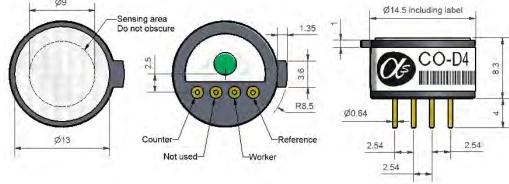

**Top View** 

All dimensions in millimetres (± 0.1 mm) **Bottom View** 

**Side View** 

p View Bo

 $N\bar{H}_3$ 

sensitivity

(A three pin version is available on request, coded CO-DF)

PERFORMANCE	Sensitivity Response time Zero current Resolution Range Linearity Overgas range	nA/ppm in 400ppm CO t <sub>90</sub> (s) from zero to 400ppm CO % 22°C ppm equivalent in zero air RMS noise (ppm equivalent) ppm limit of performance warranty ppm CO error at full scale, linear at zero and 400ppm maximum ppm for stable response to gas pulse		30 to 48 < 25 < ± 3 < 1.5 1,000 CO ± 40 2,000
LIFETIME	Zero drift Sensitivity drift Operating life	ppm equivalent change/year in lab air < 0.2 % change/month in lab air, monthly test <0.5 months until 80% original signal (24 month warranted) > 24		
ENVIRONMENTAL	Sensitivity @ -20°C Sensitivity @ 50°C Zero @ -20°C Zero @ 50°C	% (output @ -20°C/output @ % (output @ 50°C/output @ 2 ppm equivalent change from 2 ppm equivalent change from 2	20°C) @ 400ppm CO	72 to 84 105 to 111 < ± 3 < ± 4
CROSS SENSITIVITY	Filter capacity SO <sub>2</sub> sensitivity NO sensitivity NO <sub>2</sub> sensitivity Cl <sub>2</sub> sensitivity H <sub>2</sub> sensitivity C <sub>2</sub> H <sub>4</sub> sensitivity H <sub>2</sub> S sensitivity	ppm-hrs % measured gas @ 20ppm % measured gas @ 50ppm % measured gas @ 10ppm % measured gas @ 10ppm % measured gas @ 400ppm % measured gas @ 400ppm % measured gas @ 20ppm	$\begin{array}{l} {\rm H_2S} \\ {\rm SO_2} \\ {\rm NO} \\ {\rm NO_2} \\ {\rm CI_2} \\ {\rm H_2} \\ {\rm C_2H_4} \\ {\rm H_2S} \end{array}$	20,000 < 0.1 < 50 < 0.1 < 0.1 < 70 < 100 < 0.1

<b>KEY</b> Temperature range	оС	-20 to 50
SPECIFICATIONS Pressure range	kPa	80 to 120
Humidity range	%rh (see note below)	15 to 90
Storage period	months @ 3 to 2000 (stored in sealed not)	6

% measured gas @ 20ppm

Storage period months @ 3 to  $20^{\circ}$ C (stored in sealed pot) 6
Load resistor  $\Omega$  (recommended) 10 to 100
Weight g < 2

 $NH_3$ 

**Note:** Above 85% rh and  $40^{\circ}$ C a maximum continuous exposure period of 10 days is warranted. Where such exposure occurs the sensor will recover normal electrolyte volumes when allowed to rest at lower %rh and temperature levels for several days.

**NOTE:** all sensors are tested at ambient environmental conditions, with 10 ohm load resistor, unless otherwise stated. As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own requirements.

Alphasense Ltd, Sensor Technology House, 300 Avenue West, Skyline 120, Great Notley. CM77 7AA. UK
Telephone: +44 (0) 1376 556 700 Fax: +44 (0) 1376 335 899 E-mail: sensors@alphasense.com Website: www.alphasense.com





## **CO-D4 Performance Data**

Figure 2 Sensitivity Temperature Dependence

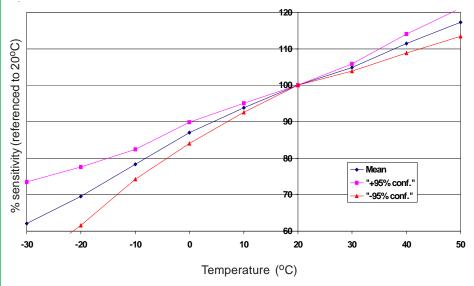


Figure 2 shows the variation in sensitivity caused by changes in temperature. Repeatable temperature dependence at elevated temperatures allows more accurate temperature compensation.

This data is taken from a typical batch of sensors. The mean and  $\pm$  95% confidence intervals are shown.

Figure 3 Zero Temperature Dependence

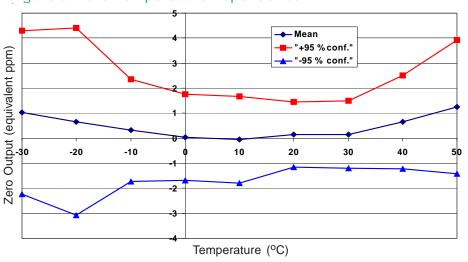


Figure 3 shows the variation in zero output caused by changes in temperature, expressed as ppm gas equivalent.

This data is taken from a typical batch of sensors. The mean and  $\pm$  95% confidence intervals are shown.

Figure 4 Overgas Performance

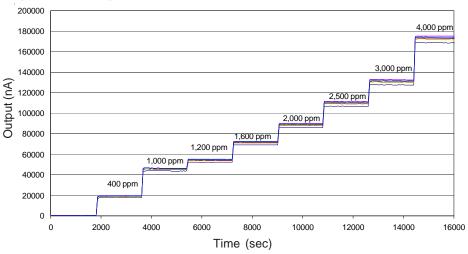


Figure 4 shows sensor output for increasing concentrations of CO, up to twice the specified overgas range. Data are derived from eight sensors taken from a typical production batch.

This stepped overgas test shows the robustness of the sensor with fast response and straight plateaus at each step.

For further information on the performance of this sensor, on other sensors in the range or any other subject, please contact Alphasense Ltd. or visit our web site at "www.alphasense.com".

In the interest of continued product improvement, we reserve the right to change design features and specifications without prior notification. The data contained in this document is for guidance only. Alphasense Ltd accepts no liability for any consequential losses, injury or damage resulting from the use of this document or the information contained within it (©ALPHASENSE LTD) Doc. Ref. TDS/COD4/Issue 122